

SPECIFICATIONS

General information

- All steel welded construction filled internally with a cementitious core material.
- Protected from corrosion by an epoxy paint finish.
- Class A flame spread rating.

UNDERSTRUCTURE

4' Bolted Stringer


COVERING

Casal Grande tile factory laminated with PVC edge band

.36" Porcelain (Color)

Edge band color

Black
 Light Grey
 Dark Grey
 Beige

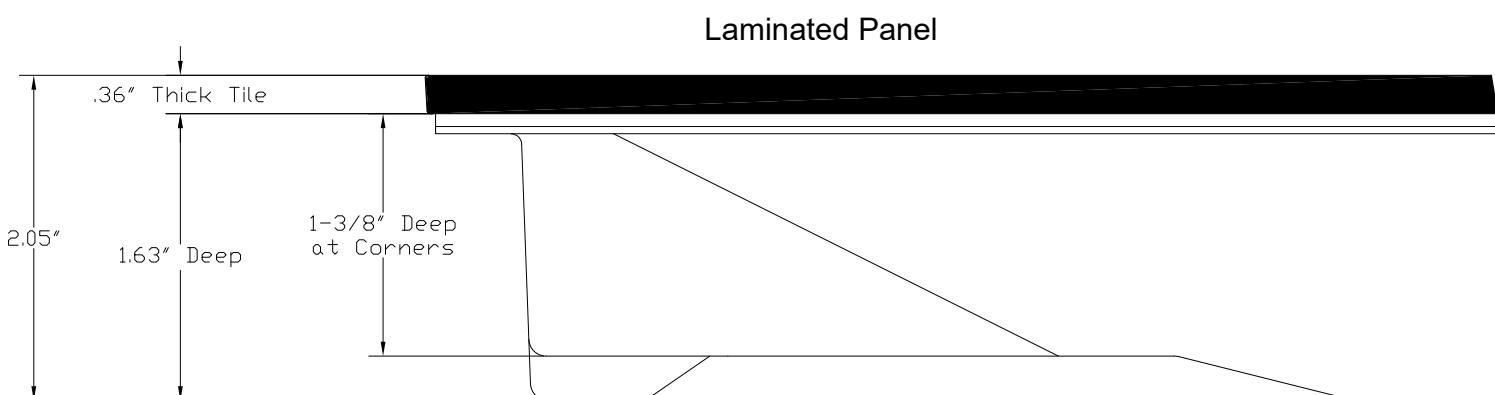

System Performance Criteria (Tested on Actual Understructure)

System Type		SYSTEM WEIGHT	STATIC LOADS			ROLLING LOADS		IMPACT LOADS
Panel	Understructure		Design Loads ¹	Ultimate Loads	Safety Factor ²	10 Passes	10,000 Passes	
ConCore 1500-24" Bare Panel	Bolted Stringer	10.5 lbs / ft ² 51.3 kg / m ²	1500 lbs 680 kg	Min. 3000lbs Min.1360kg	Min. 2	1250 lbs 567 kg	900 lbs 408 kg	150 lbs 68 kg

COVERING	TILE WEIGHT	LOAD PERFORMANCE
24" Porcelain Tile (Tile only)	5 lbs / ft ² 24.4 kg / m ²	See note 3

1. System Design Load is based on permanent set $\leq 0.010"$ and is verified by loading panels in accordance with the CISCA concentrated load method but with panels installed on actual understructure instead of steel blocks. (Testing on blocks does not represent performance of an actual installation.) Ultimate, Rolling, and Impact Load tests are performed using CISCA test procedures.

2. Safety Factor is Ultimate Load divided by Design Load.

3. Most porcelain tile manufacturers base their performance on tile installed on slab. Due to the deflection of an Access Floor, we do not recommend using the 3" x 1-13/16" hard rubber or phenolic wheel with 1/16" crown specified by CISCA as Wheel #1 for the 10 pass rolling load, and recommend limiting loading to no more than 600 lbs. Impact loads may result in damage to the tile. Contact tile manufacturer for more information.

4. Published load ratings do not apply to perimeters, cut panels or panels with cutouts.



Tate reserves the right to amend product information without prior notice. Care has been taken to ensure that the contents of this publication are accurate, but Tate, its parent company and its subsidiary companies do not accept responsibility for errors or information that is found to be misleading or outdated. Suggestions for, or descriptions of, technical specifications and the end user or application of products are provided and must be verified prior to use. To ensure you are viewing the most recent and accurate product information, please scan the QR code.