


# 38A-DB

## ELEMENT CLASS 1

The Tate Solida raised access floor system consists of high-quality floor panels with a highly density chipboard core and a circumferential edge protection banding. An aluminium foil is applied on the bottom of the panel. In conjunction with an appropriately sized substructure, this raised floor system achieves the technical values described below.

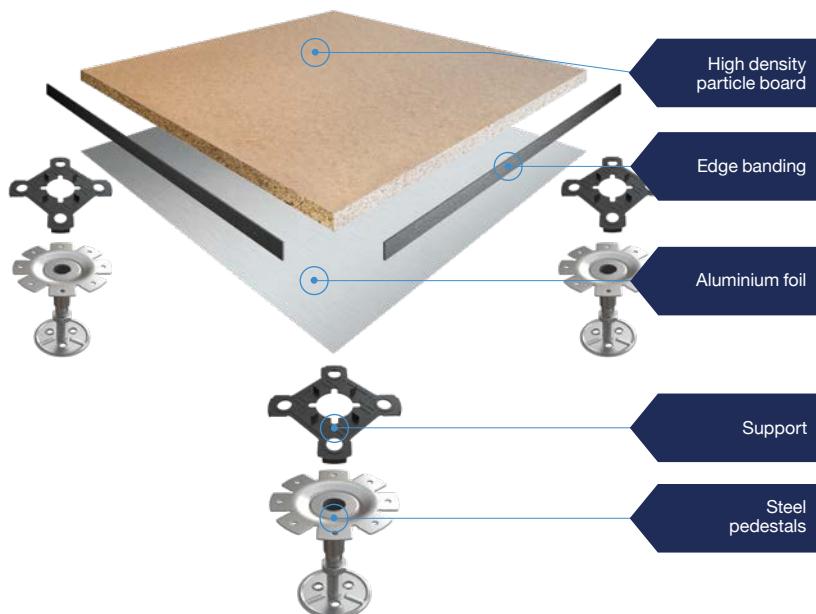

### Panels

Thickness	38 mm
Weight per panel	approx. 10,2 kg
Dimensions	600 mm x 600 mm
Core material	high-density chipboard
Building material class	B2 (core material)
Edge banding	circumferential
Panel face	surface coverings suitable for raised access floors, e.g. homogeneous vinyl, linoleum, HPL, are installed ex works
Panel bottom	Aluminium foil

### Statics according to EN 12825: 2002

Ultimate load	> 4 kN
Nominal load	2 kN
Safety factor	2,0
Deflection class	B

### Substructures

Optional or system-related stringers/cross bars as well as pedestal dimensions of at least M16 or to suit the required installation height



Please scan the QR code or click [here](#) to go to the current product page.

### Tate Global GmbH

Zum Stadion 4, 63808 Haibach, Germany

T: +49 (0) 6021 63949-0 E: [infoDE@tateglobal.com](mailto:infoDE@tateglobal.com) W: [tateglobal.com/de](http://tateglobal.com/de)

© 2025 Tate Global GmbH.

Tate Global GmbH reserves the right to amend or add to the product specifications without prior notice as part of our commitment to continuous improvements and the observance of legal changes.

tate-solida-38A-DB-datasheet-en-de-v2 12/2025



\*optionally available

# Tate.

 **PLANET  
PASSIONATE**  
#planetpassionate