

MAGNETIC BACKED ENGINEERED TIMBER OVERLAY


To view product details



Attiro®

Attiro is an innovative flooring system that allows for a stable and permanent installation of wood flooring which gives the great advantage of being able to replace one or more staves in a fast and easy way.

With its magnetic hold, Attiro guarantees ease of installation with total absence of adhesives and above all the possibility to substitute the wooden flooring without damaging the underlying surface.

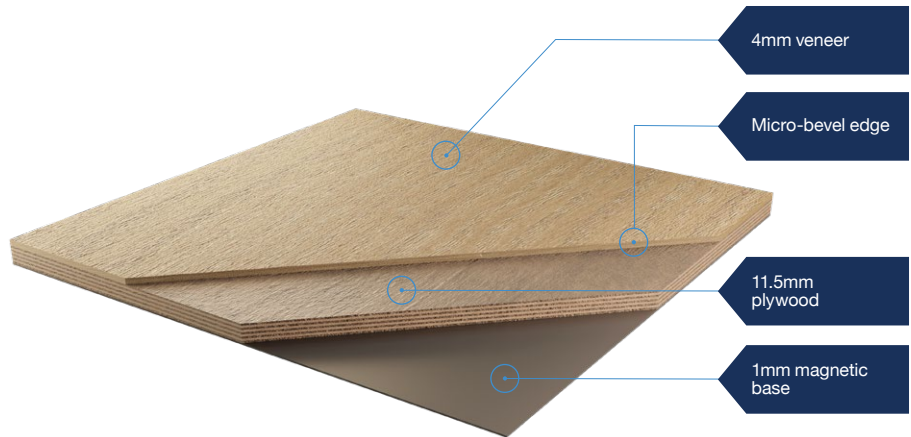

Staves	
Thickness:	16.5mm Nominal
Standard Widths:*	120, 140, 150, 180, 200 & 230mm
Lengths:	Variable lengths between 1000-2300mm
Category:	Magnetic dry lay

Performance	
Slip resistance:	Dry: >60PTV Wet: >45PTV

Magnetic Performance	
Magnet type:	Isotropic Flexible Ferrite
Wi-Fi interference:	Tested and approved
Electrical equipment:	Tested and approved incl. pacemaker & telephony devices

All genuine timber floor products (including Attiro) require a relative humidity level of 40% to 60% to be maintained throughout the building.

Attiro ferrous sheeting available for areas without the raised access floor panels, i.e. screeded areas etc. for continuity of floor finish. Contact Technical for details.

* Narrower widths for herringbone layouts available. Contact Tate for details.

Panel Fire Performance	
Reaction:	EN13501:1:2018 Cfl-s1

Raised access floor interface
Tolerance: 0.75mm maximum height difference between adjacent raised access floor panels.

Designed for use with Tate access floor systems.

Expansion Joints
8mm expansion joints every 15m width and every 35-45m in length. Colour matched 8mm factory formed silicone material. 8-10mm expansion to be included for all perimeter adjustments.

Design Assist
As part of the Attiro package we offer an industry leading bespoke Design Assist service. We engage at the beginning of the project and throughout the installation to mitigate cost variances, provide accuracy, predictability and efficiency and develop a layout plan to fully realise your vision.

Surface Finishes

Almond 10002	Dove 10003	Toffee 10004	Maple 10005	Pecan 100010	Honey 30075	
Dune 40100	Oat 40096	Chestnut 40091	Tobacco T160NAT	Amber T140NAT	Espresso 20010	Mocha 20011

Key to Finishes: Sawmill Varnish Finish Heat Treated UV Oil Finish Walnut Oak



Tate

Burma Drive, Hull, HU9 5SG, United Kingdom
T: +44 (0)1482 781701 E: hello.uk@tateglobal.com W: tateglobal.com

© 2026 Tate. We reserve the right to change specification or design and supply products which may differ from those described and illustrated without notice and without liability.
tate-attiro-product-data-sheet-en-gb-ie-v14

